

Measurement of Joint Space Width and Erosion Size

JOHN T. SHARP, DESIREE van der HEIJDE, JANE ANGWIN, JEFF DURYEYEA, HEINS J. BERNELOT MOENS, JOHANNES W.G. JACOBS, JEAN-FRANCIS MAILLEFERT, and C. VIBEKE STRAND

ABSTRACT. Measurement of radiographic abnormalities in metric units has been reported by several investigators during the last 15 years. Measurement of joint space in large joints has been employed in a few trials to evaluate therapy in osteoarthritis. Measurement of joint space width in small joints has been reported by several investigators but has not yet found a place in clinical trials in rheumatoid arthritis or osteoarthritis. We review methods for measuring joint space width in finger, toe, and wrist joints; special attention is given to how the joint edges are found, the method used to measure distance between joint margins, size of an area of the sampled joint, and reproducibility of measurements. Methods for measurement of erosion size, which have had less attention, are briefly discussed. (J Rheumatol 2005;32:2456–61)

Key Indexing Terms:

RHEUMATOID ARTHRITIS
EROSIONS

OSTEOARTHRITIS

RADIOGRAPHY

JOINT SPACE MEASUREMENT

Scoring erosions and joint space width (JSW) by trained physicians as an estimate of disease severity has proven to be a useful method of evaluating structural damage in rheumatoid arthritis (RA)¹⁻³. Comparing estimates on serial radiographs of patients in controlled trials is considered necessary to determine whether a drug is accepted as having the capacity to slow progression of structural damage. A number of studies have demonstrated limited precision in scoring and have indicated that scoring is both highly evaluator-dependent and sensitive to variation in radiographic technique. There is considerable variation between readers even when those readers are close associates with the same training for scoring radiographic abnormalities. In spite of these limitations, scoring has proven to be highly successful in detecting effectiveness of drug therapy in RA when large numbers of patients are included in each treatment arm in a therapeutic trial.

From the University of Washington School of Medicine, Seattle, WA, USA; the University of Maastricht, Maastricht, The Netherlands; GlaxoSmithKline R&D, Stevenage, England; Harvard University, Boston, MA, USA; Zienkenhuis Groep Twente, Henglo; University Medical Center, Utrecht, The Netherlands; Dijon University Hospital, University of Burgundy, Dijon, France; and Stanford University, Palo Alto, CA, USA.

J.T. Sharp, MD, Affiliate Professor of Medicine, University of Washington; D.M.F.M. van der Heijde, MD, PhD, Professor of Rheumatology, Universiteit Maastricht; J. Angwin, MA, Research Associate, Biology, Respiratory and Inflammation Centre of Excellence in Drug Discovery, GlaxoSmithKline R&D; J. Duryea, Research Associate, Brigham and Women's Hospital, Harvard University; H.J.B. Moens, MD, Rheumatologist, Zienkenhuis Groep Twente; J-F. Maillefert, MD, PhD, Associate Professor of Rheumatology, University of Burgundy; J.W.G. Jacobs, MD, PhD, Associate Professor of Rheumatology and Immunology, University Medical Center; C.V. Strand, MD, Clinical Professor of Medicine, Stanford University.

*Address reprint requests to Dr. J.T. Sharp, 8387 NE Sumanee Place, Bainbridge Island, Washington 98110, USA.
E-mail: johntsharp@worldnet.att.net.*

Clearly, measurement in standard metric units would be preferable to scoring erosions on an ordinal scale if measurement methods could be shown to be highly reproducible and easily applied. Initial attempts have been focused on measuring JSW, with only a few attempts at measuring erosions. Early measurements were carried out on large joints, especially the hip and knee, using magnifying lenses with scales included in the lens system or with calipers⁴⁻⁶. More recently, computer based methods have been developed for measuring JSW, and some studies have reported measurement of erosion size.

Computer Based Methods

Dacre and Huskisson described a computer based method for measuring joint space in the knee about 15 years ago⁷. Buckland-Wright, *et al* reported methods for measuring joint space in the knee in osteoarthritis (OA) using a Sun Spark platform, which requires that the operator locate a few points on the joint margins⁸. Duryea, *et al* reported an automated algorithm to delineate the joint margins in digital radiographs of the knee^{9,10}, and Conrozier, *et al* also reported a computer based method for measurement of hips in patients with OA¹¹.

A method developed by James, *et al* measures joint spaces in proximal interphalangeal (PIP) and metacarpophalangeal (MCP) joints of the hand using a PC platform; it requires that the operator locate only one nearby point to identify the joint to be measured¹². Duryea, *et al* reported a method using neural networks to measure PIP and MCP JSW automatically after the operator identifies nonanatomical structures in the image¹⁰. Sharp, *et al* reported a program to measure finger and wrist JSW that runs on US National Institutes of Health (NIH) Object Image using a Macintosh

computer system¹³. This program was adapted to measure hip JSW and recently was evaluated by comparing with manual measurements¹⁴. The program has been rewritten as a Java plug-in to use Image J, a freeware program that runs on a Macintosh, PC, or Linux platform. Angwin and colleagues have modified and updated the method of James, *et al*¹⁵. Vischer, *et al* wrote a macro program to measure JSW based on NIH Object Image using a Macintosh computer; this is also available on the Internet as freeware.

Reliability

Numerous factors affect reproducibility of joint measurements, such as patient positioning, radiographic procedure, site of measurement, measuring methods, and the readers.

Attempts have been made to increase the reproducibility of joint space measurement of large joints by standardizing radiographic procedures. These attempts have been especially focused on knee measurements, since the variability of positioning is much greater at the knee than the hip. These protocols use fluoroscopy and/or positioning standards^{6,17}.

Compared with manual measurements, computer based methods should increase reliability through decreasing reliance on the operator and variation in the reading procedure. They also offer the possibility to evaluate the mean JSW across the entire joint, or the joint space area, rather than the JSW at the narrowest point. Intuitively, the mean measurement might be more relevant than JSW at the narrowest point, although this is not yet proven.

Reproducibility of measurements has been reported in several studies. Large joints can be measured within an error of 0.5 to 1 mm and small joints within an error of 0.1 to 0.5 mm^{4,6,9,13-15,18-22}. With this range of precision it is estimated that a difference in mean width of 0.04 to 0.07 mm between 2 treatment groups with 50 to 200 subjects per group can be detected with 95% confidence.

Duryea, *et al* evaluated their software for measuring knee joint space using images of normal and osteoarthritic patients. Reproducibility of the minimum JSW was about twice as good as manual measurement⁹. Mazzuca, *et al* performed repeat measurements of minimal JSW on 174 osteoarthritic knees radiographed twice within 7 days in the same radiology unit. Standard error of the measurement (SEM) was 0.32 mm⁶. The SEM for radiographs repeated at different radiology units was 0.45 mm. Gordon, *et al* reported the root mean square standard deviation (SD) for 19 duplicate measurements of the minimal JSW of hips to be 0.12 mm²⁰.

Maillefert, *et al* reported the smallest detectable difference (SDD, i.e., $1.96 \times \text{SD}$ of the differences between repeated measurements) was 0.78 mm for minimal JSW using manual measurement on OA hips, 0.67 mm for computer based measurement of minimal JSW, and 0.47 mm for average JSW¹⁴. Conrozier, *et al* reported SDD of 0.22 and

0.26 mm for minimal and mean hip JSW using a computer-based method²¹. Vignon, *et al* found a SDD of 0.50 mm for the minimal knee JSW using a computer-based method and Lyon schuss radiographs²².

Comparison between methods is very limited, and the considerable variation between methods is not readily explained. Nevertheless precision of measurement in these ranges is sufficiently good to encourage further exploration of these computer based methods.

Studies on small joints of the hands, feet, and wrists also have shown variability between methods. In a reliability study measuring JSW in fingers of healthy volunteers under relatively ideal conditions, Angwin, *et al* estimated the SDD for change in JSW to be 0.11 mm for an individual PIP or MCP joint¹⁵. In a RA clinical trial, with less controlled radiographic techniques and disease affecting the positioning of the patient's hands, the smallest detectable organic change could well be larger. However, precision in this range is encouraging and further exploration of these computer based methods is warranted.

There are minimal data on the expected progression rate of joint space narrowing in the normal population. Conrozier, *et al* studied 69 hips in 61 patients who had at least 2 radiographs 12 months apart between diagnosis of OA and total hip arthroplasty; mean yearly decrease in JSW was 0.43 mm¹¹. Auleley, *et al* reported a 3-year decrease in hip JSW ranging from 0.47 to 0.6 mm, using a manual measurement method²³. A 3-year mean change in minimal hip JSW of -0.53 and -0.6 mm (manual and computer based measurements, respectively) was observed by Maillefert, *et al*¹⁴. Vignon, *et al*, using a computer based method, reported a 2-year decrease in knee minimal JSW of 0.17 mm using an extended anteroposterior view and 0.24 mm for the Lyon schuss view²².

In the small joints of the hands in RA patients, James, *et al* in a retrospective study reported an average yearly change in JSW of -0.03 mm in PIP and -0.06 mm in MCP joints in 16 female patients with established disease¹². There was, however, no significant change in PIP or MCP JSW for 18 male patients in the study. Using a later version of James's computer program in an 18 month retrospective study on 245 patients with early RA (176 female, 69 male) Angwin, *et al* found the average yearly JSW changes were -0.03 mm in PIP and -0.04 mm in MCP joints²⁴. In both studies, JSW was measured blind to time-order in 3 PIP and 3 MCP joints in each hand per patient per time point. Changes found were significant at $p < 0.05$. No attempt was made to divide clinically involved from noninvolved joints. Measurement changes agreed with scoring in that the reduction in JSW was significantly greater for the 93 PIP and MCP joints with an increase in joint space narrowing score than for the 2572 joints with no change in joint space narrowing score: -0.336 mm and -0.040 mm, respectively, over the 18 month mean study. Lacking robust data on the progression of narrowing

in the normal population, the significance of these numbers is not yet clear.

The rate of JSW change varied considerably between patient subsets. Using measurements from 6-monthly radiographs for the same 245 RA patients (unpublished data), the annualized change in JSW in the 96 patients who left the study after a mean duration of 8 months was -0.08 mm in PIP and -0.10 mm in MCP joints, which was more than twice the annualized average for all 245 patients. Conversely, 124 patients who remained in the study for 2 years had an initial rate of JSW decrease in line with study average, but a reduced rate of change after one year, giving an annualized change averaged over the study duration of -0.02 mm in PIP and -0.03 mm in MCP joints. In the subset of 33 patients expected to be susceptible to severe disease progression, JSW decreased steadily over the full 2 years, with average yearly change of -0.03 mm in PIP and -0.05 mm in MCP joints²⁵. Not surprisingly, there was much greater variability in repeat measurements for the 245 RA patients over 18 months than for 8 healthy volunteers over 3 weeks (4–5-fold increase in the SD of the within-patient change in JSW).

With further improvement in software, emphasizing better automation and greater efficiency of programs, some increase in sensitivity is to be expected. The greatest improvement in both precision and sensitivity is likely to come from better standardized techniques for obtaining images, paying particular attention to positioning of limbs, radiation exposure, and film quality and development. Some technical problems will be resolved when digital recording of images is routine, but other problems such as aging of light-sensitive plates will need to be carefully standardized.

How Should Problem Joints Be Handled?

Agreement needs to be reached regarding how to address frequently observed anatomical variations that influence measurements. Many normal PIP joints flare at the margins (Figure 1). What area or single location can be measured reproducibly in such a joint? Should we even try to measure such joints? Is this flare an inherent property of the PIP joint or is it the result of rotation? Is rotation the only factor that brings out this feature?

Flexion contractures are significant abnormalities that eventually occur in many patients with RA and pose significant problems in making measurements. When scoring a flexed joint, the reader automatically factors in the flexion, but in making measurements, does the presence of the flexion contracture displace the joint edge so that the measurement does not accurately represent the fully extended joint? Serial imaging in RA and other inflammatory arthritides starting early in disease and extending over months and years means that measuring change over time requires an early decision about how to handle joints that become flexed during followup.

Asymmetrical joint space is another frequently encountered problem. Many joints are slightly asymmetrical, which may be imperceptible to the naked eye and only detected by precise measurements across all regions of the joint. Metatarsophalangeal joints present another problem: often they are wider in the center than on either medial or lateral sides because of a flat metatarsal head seated in the base of an arc-shaped proximal phalanx. What is the proper measurement of these joints?

In cases with evident gross asymmetry in the PA projection there may be subluxation, but it is not possible to detect this in a 2-dimensional view unless there is bony overlap. In the Sharp and Sharp/van der Heijde scoring methods this asymmetry is scored as 1 on the joint space narrowing scale of 0–4. How should such grossly asymmetrical joints be measured? Neither an average across the breadth of the joint, medial to lateral, nor the shortest measurement across the joint at the narrowest point accurately represents the joint space.

Collecting and analyzing measurement data on cohorts that include such joints requires establishing a standard method of handling these abnormalities. Some of these questions can be answered with more experimental data. In other situations in which relevant data are indeterminate because of insufficient data or inconsistent results, standards will have to be based, at least temporarily, on a consensus among active investigators.

Differences Between Methods

Some substantial differences between methods exist, but their effect has not been tested. In principle, results between methods should be interchangeable, but several factors must be well controlled for this to be true. Radiographic technique should be standardized with regard to distance from x-ray source to object and object to film. Positioning of the joints to be measured must be well controlled to limit rotation in any plane. This is particularly important in measuring large joints because of the considerable distance between the joint and the image cassette, and of minor importance in small joints that are imaged very close to the film or phosphor plate. Selection of the area of the joint to be measured should be uniform between measurements. Methods of identifying the joint margin vary between measurement methods. As long as the same method is used for the baseline and followup radiographs, this difference should not matter in following progression of disease. In collecting data on change in measurement, both measurements should be done by the same method. Comparing such change data obtained by different methods should be valid if the difference between methods is known to be an offset that is constant for all types of joints. For example, the James method identifies the joint margin as the pixels with the greatest density in the dense line at the base of the proximal or middle phalanges in the finger joints, whereas the Sharp

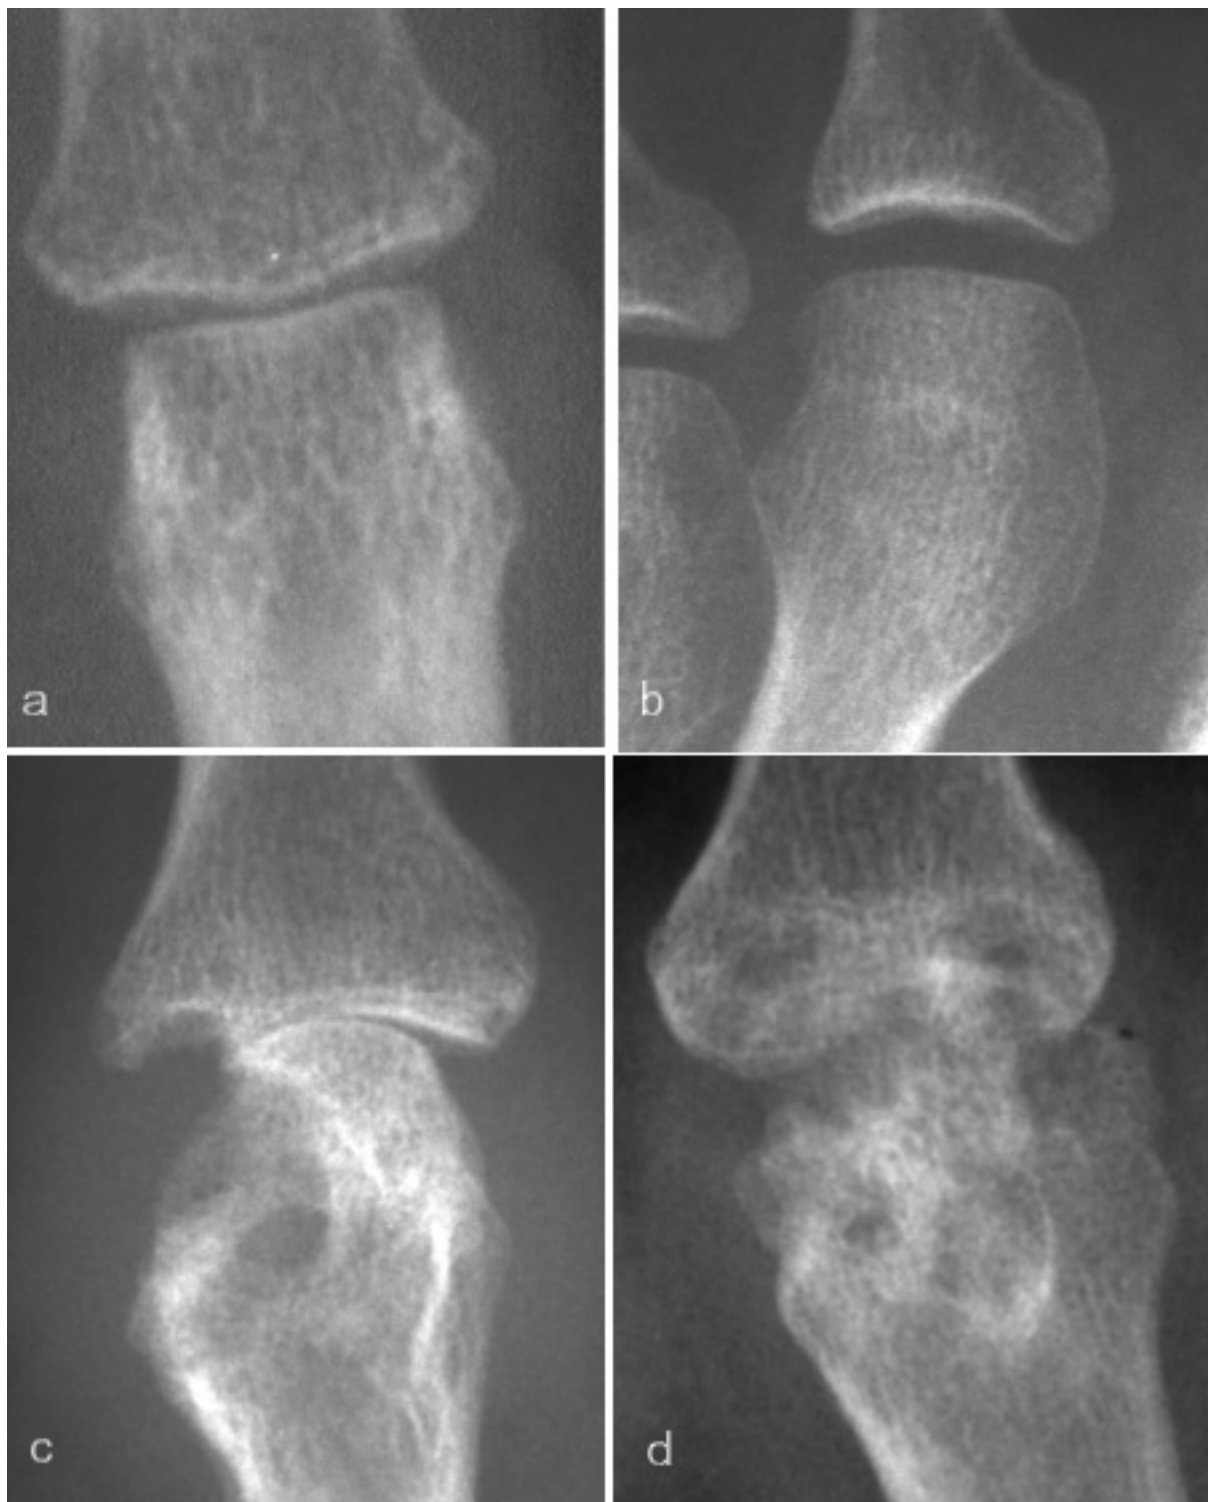


Figure 1. Four joints that pose problems for measuring joint space width. (a) PIP joint showing flaring of the joint space at both the medial and lateral sides. (b) Metatarsophalangeal joint illustrating a bulge in the center of the joint. (c) A grossly asymmetrical MCP joint with no joint space on the radial side and a widening space on the ulnar side. (d) MCP joint without discernible joint margins.

method locates the joint margin nearer the shoulder of the joint edges. The distance between the shoulder and the peak density of the joint margin might be relatively constant for

specific joints, but can vary between different types of joints, for example, toe, finger, and wrist joints.

Calculation of the JSW has utilized several different

methods. In the Lynch method the largest circle that is completely contained between joint margins is fitted at regularly spaced intervals, and the diameter of these circles is averaged to determine the distance between the joint margins²⁶. Sharp, *et al* obtain the shortest distance across the joint for every pixel on the x-axis of the distal margin of the joint by iterative measurement, moving a line anchored on the outer margin one pixel at a time on the inner margin¹³. Vischer creates a series of trapezoids contained within the joint space to measure the shortest distance between the 2 joint margins (unpublished observations).

All the above methods that make multiple, evenly spaced measurements generate data that would allow calculation of a correlation coefficient between the location of each measurement and the JSW for that location. Sharp, *et al* routinely report this calculation along with the slope, which together make it possible to evaluate the extent of the asymmetry.

Before employing JSW measurement in clinical trials extensive basic data on normal joints and progression of JSW loss and variance of measurements are needed in cohorts stratified for age, sex, physical activity, and disease. Determining which joints to measure in which disease and disease stage in terms of sensitivity to change would be of great value. For example, the joints to measure in OA and RA would likely be different, as well as for early versus long-standing RA²⁷.

In summary, limited relevant JSW measurement data are currently available and few comparisons have been made between methods. Nevertheless it is already clear that computer based measurement of JSW is highly reproducible within limits of less than 1 mm for large joints and less than 0.4 mm for small joints. Reproducibility and sensitivity to change can probably be improved by further refinement of computer programs. The data already available suggest that measurements are sufficiently sensitive to be useful in following disease progression in the hands of patients with RA, but whether measurements would be more sensitive to change than scoring has not yet been determined.

Erosions

Three methods to measure erosion size have been reported. Buckland-Wright, *et al*, using digitized macroradiographs and a projection unit, traced the erosion margins on a digitizing tablet to measure erosion area in the 2-dimensional representation of the erosion^{28,29}. Higgs, *et al* created templates of different shapes and known area to match observed erosions for measuring erosion size³⁰. Sharp, *et al* scanned plain radiographs and measured optical density (OD) in an area outlined to include the erosion¹³. OD was expressed in units standardized for the third finger proximal phalanx and compared to a similar but uninvolved anatomical area. The latter method gives an estimate of the volume of the eroded area expressed in units calibrated for the density in the same patient's third proximal phalanx, provided certain conditions

are met. The method is based on linear absorption of x-rays over a range of about 5 log, adequate dynamic range of the x-ray film used to capture the image, and a scanner with sufficient range to encompass the range of bone density in the calibration area and region of interest. These conditions are not always met unless careful attention is paid to radiographic technique and appropriate quality of film or light-sensitive imaging plate.

Development of useful methods of measuring erosions is not as far along as measurement of JSW and is clearly more challenging. Finding the distance between 2, usually nearly parallel, lines is not a difficult problem, given the tools available to skilled computer programmers. Finding the edge of an erosion is a more nebulous proposition. Active erosions are characterized by no perceptible edge. Instead, normal bone density gradually fades into the background soft tissue density. Because this challenge is daunting, investigators tend to look for more tractable problems for which, with reasonable effort, a definitive answer is expected.

Measurement in Clinical Trials

As of now, measurements have not made a significant impact on clinical trials. Only a few have been reported^{8,31-34}. Within the last few years several investigators have focused attention on measuring changes in OA in the hopes that new agents can be developed to slow the loss of cartilage. If measurement proves to be more sensitive than scoring, measurement will play a major role in the evaluation of putative OA disease modifying agents. In RA, our greatest attention has been given to progression, stabilization, and repair of erosions. Since there is some evidence that destruction of cartilage and bone are not tightly linked in RA, there is a potential role for studies that evaluate cartilage loss in a more precise fashion than is possible with scoring. If a more sensitive and reproducible method than scoring can be developed, there will be a role for such methods in reducing the number of patients required in studies evaluating disease modifying agents in RA. Further effort to improve measurement methods is warranted.

REFERENCES

1. Sharp JT, Lidsky MD, Collins LC, Moreland J. Methods of scoring the progression of radiologic changes in rheumatoid arthritis. *Arthritis Rheum* 1971;14:706-20.
2. Larsen A. A radiologic method for grading the severity of rheumatoid arthritis [thesis]. University of Helsinki; 1974.
3. van der Heijde DMFM, van Reil PL, Nuvar-Zwart IH, Gribnau FW, van de Putte LB. Effects of hydroxychloroquine and sulphasalazine on progression of joint damage in rheumatoid arthritis. *Lancet* 1989;1:1036-8.
4. Ravaud P, Giraudeau B, Auleley GR, et al. Variability in knee radiographing: implication for definition of radiological progression in medial knee osteoarthritis. *Ann Rheum Dis* 1998;57:624-9.
5. Ravaud P, Auleley GR, Chastang C, et al. Knee joint space width measurement: an experimental study of the influence of radiographic procedure and joint positioning. *Br J Rheumatol*

- 1996;35:761-6.
6. Mazzuca SA, Brandt KD, Buckland-Wright JC, et al. Field test of the reproducibility of automated measurements of medial tibiofemoral joint space width derived from standardized knee radiographs. *J Rheumatol* 1999;26:1359-65.
 7. Dacre JE, Huskisson EC. The automatic assessment of knee radiographs in osteoarthritis using digital image analysis. *Br J Rheumatol* 1989;28:506-10.
 8. Buckland-Wright JC, MacFarlane DG, Lynch JA, Jasani MK. Quantitative microfocal radiography detects changes in OA knee joint space width in patients in placebo controlled trial of NSAID therapy. *J Rheumatol* 1995;22:937-43.
 9. Duryea J, Li J, Peterfy CG, Gordon C, Genant HK. Trainable rule-based algorithm for the measurement of joint space width in digital radiographic images of the knee. *Med Phys* 2000;27:580-91.
 10. Duryea J, Jiang Y, Zakharevich M, Genant HK. Neural network based algorithm to quantify joint space width in joints of the hand for arthritis assessment. *Med Phys* 200;27:1185-94
 11. Conrozier T, Jousseau CA, Mathieu P, et al. Quantitative measurement of joint space narrowing progression in hip osteoarthritis: a longitudinal retrospective study of patients treated by total hip arthroplasty. *Br J Rheumatol* 1998;37:961-8.
 12. James MF, Heald G, Shorter JH, Turner RA. Joint space measurement in hand radiographs using computerized image analysis. *Arthritis Rheum* 1995;38:891-901.
 13. Sharp JT, Gardner JC, Bennett EM. Computer-based methods for measuring joint space and estimating erosion volume in the finger and wrist joints of patients with rheumatoid arthritis. *Arthritis Rheum* 2000;43:1378-86.
 14. Maillefert JF, Sharp JT, Aho LS, Dougados M. Comparison of a computer-based method and the classical manual method for radiographic joint space width assessment in hip osteoarthritis. *J Rheumatol* 2002;29:2592-6.
 15. Angwin J, Heald G, Lloyd A, Howland K, Davy M, James MF. Reliability and sensitivity of joint space measurements in hand radiographs using computerized image analysis. *J Rheumatol* 2001;28:1825-36.
 16. Vischer NOE, Huls PG, Woldringh CL. Object-Image: an interactive image analysis program using structured point collection. *Binary* 1994;6:160-6.
 17. Mazzuca S, Brandt KD. Is knee radiography useful for studying the efficacy of a disease-modifying osteoarthritis drug in humans? *Rheum Dis Clin North Am* 2003;29:819-30.
 18. Ravaud P, Giraudeau B, Auleley GR, et al. Radiographic assessment of knee osteoarthritis: Reproducibility and sensitivity to change. *J Rheumatol* 1996;23:1756-64.
 19. Ravaud P, Giraudeau B, Auleley GR, Edouard-Noel R, Dougados M, Chastang C. Assessing smallest detectable change over time in continuous structural outcome measures: Application to radiological change in knee osteoarthritis. *J Clin Epidemiol* 1999; 52:1225-30.
 20. Gordon CL, Wu C, Peterfy CG, et al. Automated measurement of radiographic hip joint-space width. *Med Phys* 2001;28:267-77.
 21. Conrozier T, Hilliquin P, Favret H, et al. Minimal change of joint space width to be relevant for detecting radiological progression in hip osteoarthritis [abstract]. *Arthritis Rheum* 2002;46 Suppl:S152.
 22. Vignon E, Piperno M, Le Graverand MP, et al. Measurement of radiographic joint space width in the tibiofemoral compartment of osteoarthritic knee: comparison of standing anteroposterior and Lyon schuss views. *Arthritis Rheum* 2003;48:378-84.
 23. Auleley GR, Giraudeau B, Dougados M, Ravaud P. Radiographic assessment of hip osteoarthritis progression: impact of reading procedures for longitudinal studies. *Ann Rheum Dis* 2000;59:422-7.
 24. Angwin J, Lloyd A, Heald G, Nepom GT, Binks MH, James MF. Radiographic hand joint space width assessed by computer is a sensitive measure of change in early rheumatoid arthritis. *J Rheumatol* 2004;31:1050-61.
 25. Angwin J, Heald G, Nepom GT, Binks MH, James MF. Radiographic hand joint space width assessed by computer detects RA disease progression at 6 months in susceptible patients. [abstract]. *Arthritis Rheum* 2003;48 Suppl:S536.
 26. Lynch JA, Buckland-Wright JC, MacFarlane DG. Precision of joint space width measurement in knee osteoarthritis from digital image analysis of high definition macroradiographs. *Osteoarthritis Cartilage* 1993;1:209-18.
 27. Hulsmans HMJ, Jacobs JWJ, van der Heijden DMFM, Albada-Kuipers G, Schenk Y, Bijlsma JWJ. The course of radiologic damage during the first six years of rheumatoid arthritis. *Arthritis Rheum* 2000;43:1927-40.
 28. Buckland-Wright JC, Clarke GS, Chikanza IC, Grahame R. Quantitative microfocal radiography detects changes in erosion area in patients with early rheumatoid arthritis treated with mycristine. *J Rheumatol* 1993;20:243-7.
 29. Buckland-Wright JC, Carmichael I, Walker SR. Quantitative microfocal radiography accurately detects joint changes in rheumatoid arthritis. *Ann Rheum Dis* 1986;45:379-83.
 30. Higgs JB, Smith D, Des Rosier KF, Charlesworth RW Jr. Quantitative measurement of erosion growth and joint space loss in rheumatoid arthritis hand radiographs. *J Rheumatol* 1996;23:265-72.
 31. Reginster JY, Deroisy R, Rovati LC, et al. Long-term effects of glucosamine sulphate on osteoarthritis progression: a randomized, placebo-controlled clinical trial. *Lancet* 2001;357:251-6.
 32. Raynaud JP, Buckland-Wright JC, Ward R, et al. Safety and efficacy of long-term intra-articular steroid injections in osteoarthritis of the knee: a randomized, double-blind, placebo-controlled trial. *Arthritis Rheum* 2003;48:370-7.
 33. Brandt KD, Mazzuca SA, Katz BP, Lane KA. Doxycycline slows the rate of joint space narrowing in patients with knee osteoarthritis [abstract]. *Arthritis Rheum* 2003;48 Suppl:3652.
 34. Jubb RW, Piva S, Beinat L, Dacre J, Gishen P. A one-year, randomized, placebo (saline) controlled clinical trial of 500-730 kDa sodium hyaluronate (Hyalgan) on the radiological change in osteoarthritis of the knee. *Int J Clin Pract* 2003;57:467-74.